

Specifications

Input

Pulse prolongations 220 – 300 ms

Power Supply

Power supply smart-house bus

Rated operational current

Typically 200 μ A

All LED's activated (ON) typ. 3 mA

General Specifications

Channel coding By BGP-COD-BAT and special cable: GAP-TPH-CAB. After mounting reprogramming can be done by removing the slim cover between the pushbutton and using the attached adapter for the GAP-TPH-CAB cable.

In/out 1 - 4 Pushbutton 1 - 4
In/out 5 - 8 LED 1 - 4 (see figure 1)

Enclosure (LK FUGA Mechanics)

Environment

Degree of protection IP 20
Pollution degree 3 (IEC 60664)
Operating temperature 0 - 50 °C/32 -122°F
Storage temperature 20 - 70°C/-4 - 158°F

Humidity (non condensing) 20 - 80%

Weight 50 g

Dimensions 66 x 66 x 11mm

(including frame)

Max. wire in terminals Max. 2 x 0.75 mm²



User Manual



Fuga Light Switch

Type BFW-LS4




Over Hadstenvej 40, DK-8370 Hadsten
Phone +45 89606100, Fax +45 86982522

Certified in accordance with ISO 9001

MAN BFW-LS4 rev 10 06.07

Dimensions

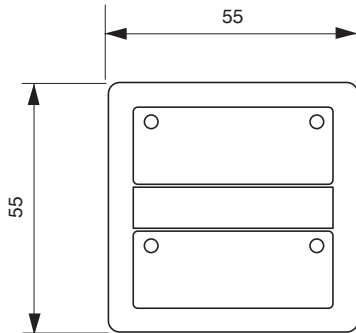

Push botton/LED allocation

Figure 1

