# **UWP 3.0**



#### Universal web platform











#### Description

UWP 3.0 is a monitoring gateway and controller that allows the monitoring and controlling of installations where Energy Efficiency Management, Building Automation and Car Park Guidance functions are needed.

The system monitors and controls connected devices via its local bus management functions; it includes a web server with a powerful and intuitive user interface to display customised dashboards and interact with local devices and remote systems; the UWP 3.0 embedded automation server allows data to be exchanged locally or remotely via standard Internet protocols.

UWP 3.0 can manage the complete lighting control system based on DALI actuators and it can operate as a BACnet/IP gateway.

#### Benefits

- Flexibility. UWP 3.0 is the core of a powerful system which includes a complete range of meters, sensors and actuators
- Integration. UWP 3.0 includes all the necessary software tools to set up and operate the required solution. No subscriptions or additional services are required
- Interoperability. By leveraging its automation-server functions, it is easy to exchange data with other systems via FTP, SFTP, FTPS, SMTP, Rest-API, MQTT, Modbus and BACnet
- Scalability. It is easy to scale up the system, by leveraging its comprehensive set of monitoring, controlling and communication functions
- Fast installation and set up. Each function can be programmed with ease by means of the free configuration tool
- Reliability. The system is secure against cyber-attacks and computer viruses. It is the ideal Edge unit for providing local control and data redundancy to distributed applications
- High storage capability. Thanks to its 4GB of Storage memory, UWP 3.0 can store complex configurations and log history and events
- IoT Ready. UWP 3.0 is Microsoft Azure Certified for IoT
- Powered by AWS. UWP 3.0 is compatible with Amazon AWS IoT.
- Awareness. By means of scheduled reports and email/SMS alerts, users are constantly advised about installation status
- Compact Size. All of the above is available in a 2 DIN module
- Powered by MAIA Cloud: secure and reliable system for remotely managing, setting and operating UWP 3.0 units Worldwide.
- IoT Security Rating: Security Capabilities Verified by UL to Level SILVER for UWP 3.0 SE (Security Enhancement).

#### **Applications**

UWP 3.0 is suitable for applications in Building Automation, Energy Efficiency Performance Management, Car Parking Guidance and all their combinations are suitable application for UWP 3.0. Its comprehensive set of functions, small dimensions and reliability are the key factors for depending on UWP 3.0 as the local monitoring/controlling unit in a wider distributed scenario.



#### **Main functions**

- · Monitoring energy control systems so as to check energy efficiency status and improvements.
- Recording, displaying and transmitting information (events and history)
- · Defining logical functions, reacting to abnormal conditions and control actuators
- · Setting up and operating Building Automation functions
- · Setting up and operating Lighting Control functions and DALI
- Setting up and operating Car Parking Guidance systems




#### Main features

- Up to 5000 managed signals (including variables, I/Os) shared among Energy Management, Building Automation and Car Park applications\*.
- Up to 128 Modbus devices connected to RS485 ports (64 devices each port).
- Up to 5 users concurrently connected to the Web-App.
- Up to 5 concurrent M2M connections (API connections, BACnet clients, Modbus masters).
- Up to 150 different products from the Carlo Gavazzi range can be connected to UWP 3.0
- BTL certified (max 500 BACnet points for used BACnet objects).

\*Note: when the Car Park system is active, there will be 2000 signals available for the other applications (Energy Management and Building Automation).




# **Architecture**

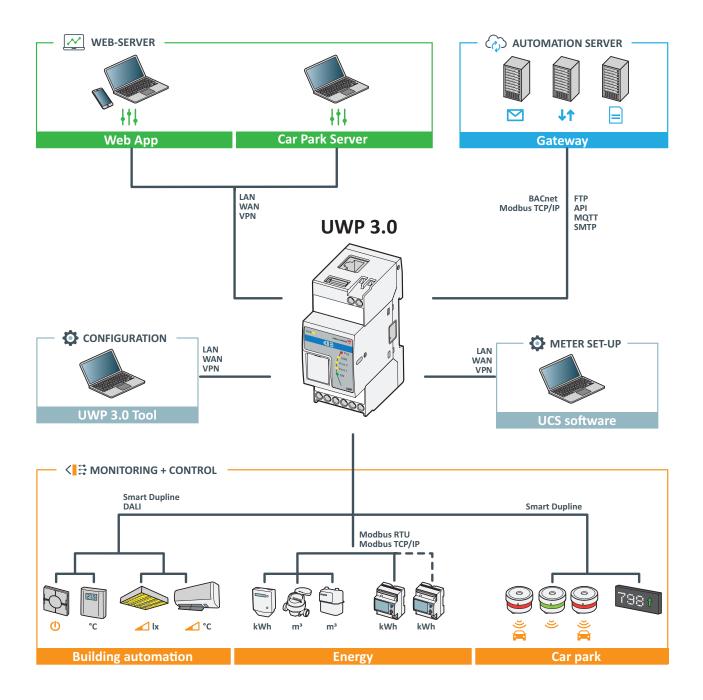



### Structure

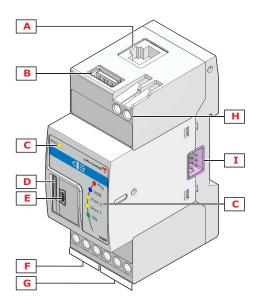


Area	Description	
Α	Ethernet port	
В	USB port (host function)	
С	Indication LEDs:  Green (ON) ON - Power ON OFF - Power OFF  Yellow (BUS) ON - Communication ON on the HS-bus OFF - No communication error on the HS-bus Flashing - Communication error on the HS-bus Yellow (Port 1) OFF - Communication disabled Flashing 200 ms ON, 600 ms OFF - No communications on RS485 COM1 Flashing 200 ms ON, 200 ms OFF - Communications OK  Yellow (Port 2) OFF - Communication disabled Flashing 200 ms ON, 600 ms OFF - No communications on RS485 COM2 Flashing 200 ms ON, 600 ms OFF - No communications on RS485 COM2 Flashing 200 ms ON, 200 ms OFF - Communications OK  Blue (USB) ON - USB device is present OFF - No USB device is present Red (Prg) ON - No configuration is present in the UWP Flashing - UWP is connected to the UWP 3.0 Tool	
D	Micro SD memory card slot	
E	Mini-USB port (Device function)	
F	RS485 COM1 port terminals	
G	RS485 COM2 port terminals	
Н	Power supply connection block	
I	Local bus ports (left side and right side)	




# **Features**

#### General

Material	Noryl, self-extinguishing V-0 (UL94)
Dimensions	2-DIN module
Weight	150 g
Protection degree	Front: IP40; Screw terminals: IP20
Dielectric strength	4000 VAC RMS for 1 minute
Rejection (CMRR)	>65 dB, from 45 to 65 Hz
Terminals	8 terminals, screw-type; Section: 1.5 mm² maximum; Torque: from 0.4 to 0.8 Nm

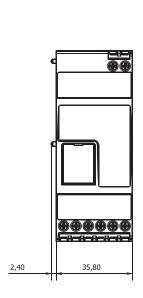

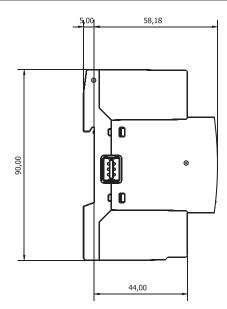

### Environmental

Operating temperature	-20° to +50°C (-4° to 122°F)
Storage temperature	-30° to +70°C (-22° to +158°F)
Humidity (non-condensing)	20 to 90% RH

#### **Power Supply**

Power supply	15-28 V dc
Consumption	≤ 5 W
Battery	1 Metal-ion non-replaceable battery; 0.04 g

Note: The device contains metal-ion batteries. For the sending, you must comply with the relevant packaging and labelling regulation.



### Inputs/outputs insulation

Type of input/ output	DC power supply	RS485 COM1	RS485 COM2	Ethernet	USB port "H"	USB port "D"	SH2UMMF124 and SH2DSP24
DC power supply	-	2 kV	2 kV	0.5 kV	0 kV	0 kV	0 kV
RS485 COM1	2 kV	-	0.5 kV	2 kV	2 kV	2 kV	2 kV
RS485 COM2	2 kV	0.5 kV	-	2 kV	2 kV	2 kV	2 kV
Ethernet	0.5 kV	2 kV	2 kV	-	0.5 kV	0.5 kV	0.5 kV
USB port "H"	0 kV	2 kV	2 kV	0.5 kV	-	0 kV	0 kV
USB port "D"	0 kV	2 kV	2 kV	0.5 kV	0 kV	-	0 kV
SH2DSP24	0 kV	2 kV	2 kV	0.5 kV	0 kV	0 kV	-

- **0kV**: inputs / outputs are not insulated.
- **2kVrms**: EN61010-1, IEC60664-1 over-voltage category III, pollution degree 2, double insulation on systems with max. 300Vrms to ground.
- 0.5kVrms: the insulation is functional type Mounting.

#### Compatibility and conformity

	Electromagnetic compatibility (EMC) - immunity: EN61000-6-2
Standards	Electromagnetic compatibility (EMC) - emissions: EN61000-6-3
	Safety: EN60950
	EMC 2014/30/EU
Directives	LVD 2014/35/EU
	RoHS 2011/65/EU
Approvals	Security Capabilities Verified SILVER  Cybersecurity Rating (SE version)



# **Ports**

#### Ethernet

Standard	ISO9847
LAN Configuration	Static or DHCP
LAN Comiguration	IP Address; Net Mask; Default Gateway, DNS (primary, secondary)
DYNDNS	dyndns.it, dyndns.org, freedns.afraid.com, zoneedit.com, no-ip.com, easydns.com, 3322.
DINDIS	org, sitelution.com, dnsoimatic.com, tunnelbroker.net, tzo.com, dhis.com
Protocols	HTTP, HTTPS, FTP, FTPS, SFTP, Modbus TCP/IP, DP (Data Push), SMTP, NTP, Azure IoT
FIOLOCOIS	Hub, Modbus Gateway TCP/RTU, BACnet IP
	WEB server: Port: 80; 5 connections
Client connections	TOOL: 1 connection
	Modbus TCP/IP: 5 connections
Connection type	RJ45 connector (10 Base-T, 100 Base-TX); maximum distance: 100m

# RS485

Number of ports	2
Function	COM1: Master or slave (gateway function)
Function	COM2: Master
Number of alayse	COM1: up to 64
Number of slaves	COM2: up to 64
Connections	2-wire. Max. distance 600 m
Protocol Modbus RTU	
Data format Selectable: 1 start bit, 7/8 data bit, no/odd/even/ parity, 1/2 stop bit	
Baud-rate Selectable: from 110 to 256000 bits/s	
Driver input conchility	1/8 unit load
Driver input capability	Up to 256 nodes on a network

# USB

Туре	Hi-speed 2.0 Type-A
Mode	Host
Communication speed	60MB/s
Function	Backup for disaster recovery
Supported Davise Type	USB mass storage: direct connection to UWP 3.0
Supported Device Type	USB modem/router: via additional module SH2DSP24
Supported File System ext4	
Note	Disabled automatically when SH2DSP24 is connected



### Mini-USB

Туре	Hi-speed 2.0 mini-B
Mode	Device
Speed	60 MB/s
Function	RNDIS (Virtual Ethernet) Network Access via IP: 192.168.254.254





### Micro SD slot

Туре	ndustrial (from -25 to +85 °C / -13 to + 185 °F)		
Capacity	SD and SDHC Up to 32 GB		
Function	Backup for disaster recovery		
Supported File System	ext4		



### HS Bus

Bus type	RS485 high speed bus
Function	Connection to master channel generator modules (SH2MCG24, SH2WBU230x, SH2DUG24 and SBP2MCG324)
Number of slaves	Maximum 7
Connection	By local bus on the right hand side Note: All the SH2MCG24, SH2WBU230x, SH2DUG24 and SBP2MCG324 modules have to be connected on the right hand side of the SH2WEB24.
Termination	Always required on the last module
Max distance	600 m



# **TCP/IP Ports**



#### Inbound communication

Port number	Description	Purpose
80	HTTP	Access to the internal web-server, API functions
443	HTTPS	Access to the internal web-server, API functions
52325	SSH	Remote service (reserved to support personnel)
10000	UWP 3.0	Configuration and maintenance (UWP 3.0 Tool)
10002	UWP 3.0	Configuration and maintenance (UWP 3.0 Tool)
52326	UWP 3.0	Firmware update (UWP 3.0 Tool)



#### **Outbound communication**

Port number	Description	Purpose
53	DNS	Domain name resolution
123	NTP	Network time services access
21	FTP	Data upload to FTP server
25	SMTP	Email message dispatching
80	HTTP	DP (data push communication)



### UCS bridge

Mode	Port	Description
Secure	443	For the HTTPS connection for bridge opening.
Insecure	503*	Through any TCP Modbus client. *Note: This port is the default one. Users can change it from the web-app relevant page.



### Modbus TCP/IP

Function	TCP Port	Purpose
Modbus TCP/IP Slave	502 (selectable)	Modbus TCP data communication
Modbus bridge TCP/RTU	Lous (Seleciable)	Bridge function for accessing (read and write) RTU meter connected to the UWP RTU ports



# **MAIA Cloud ports**



#### Inbound communication (Through the tunnel)

Port number	Description	Purpose
80	HTTP	Access to the internal web-server, API functions
443	HTTPS	Access to the internal web-server, API functions, configuration (UWP 3.0 Tool)
52325	SSH	Remote service (reserved to support personnel)
10000	UWP 3.0	Configuration and maintenance (UWP 3.0 Tool)
10002	UWP 3.0	Configuration and maintenance (UWP 3.0 Tool)
52326	UWP 3.0	Firmware update (UWP 3.0 Tool)



#### **Outbound communication (Through the tunnel)**

Port number	Description	Purpose
53	DNS	Domain name resolution
123	NTP	Network time services access
21	FTP	Data upload to FTP server
25	SMTP	Email message dispatching
80	HTTP	DP (data push communication)

#### For tunnelling

Access	Ports
MAIA Cloud Web	443/tcp and 1194/udp
MAIA Cloud App software	443/tcp and 1194/udp

Note: through the tunnelling service, all the above-mentioned ports are supported.

# **Data management**

Multi-BUS communica-	INPUT from: Modbus RTU, Modbus TCP/IP, Dupline	
tion	OUTPUT to: Modbus RTU, Modbus TCP/IP, BACnet, Dupline, DALI	
Embedded Database	Embedded database for storing system configuration, variables, events	
Ellibedded Dalabase	Flexible data model based on signals definition and functions creation	
Automation server	Automation server for exchanging data with other systems via: FTP, SFTP, FTPS, Rest-API, SMTP, MQTT	

\*Note: Data stored on the internal UWP 3.0 database (including logged data points, events and configuration parameters) are preserved in the case of system shutdown. UWP 3.0 storage memory size is 4.0 GB (including all the logged data points, events and configuration parameters).



# **Functions**

### Local monitoring and control

Connectable devices	Carlo Gavazzi Meters Smart Dupline sensors and actuators BACnet masters Modbus RTU, Modbus TCP/IP slaves (any Modbus slave can be integrated thanks to the Free Modbus Editor tool)
Monitoring functions	Logging of variables and events Average, Maximum, Minimum calculation Creation of triggers based on events
User Interface functions	Responsive web interface Customised dashboards Charting tools for displaying and analysing history data Cost centres base navigation tree Energy Summary display Dedicated widgets for monitoring control functions
Automation Server functions	M2M communication via: Rest-API, FTP, SFTP, FTPS, MQTT, SMTP, Modbus TCP/IP, BAC-net Email or SMS alerts Multi-site data aggregation via Em²-Server Microsoft Azure certified for IoT
Reporting	Online or scheduled reports in XLSX, XML, CSV format XLSX report templates with free variable selection

### Local control

	Carlo Gavazzi Meters
Connectable devices	Smart Dupline sensors and actuators
	Modbus RTU, Modbus TCP/IP slaves and DALI ballasts
Control functions	ON/OFF switching Standard Light Control functions, including DALI and dimming Advanced Light Control, including Tunable White Control and Constant Light Temperature control Roller Blind control BMS integration via Modbus TCP/IP and BACnet Logic functions, timers, analog comparators Calendar scheduler Math function Analogue (0-10 V) Output Smoke, Water, Intruder alarms Astronomical clock Hour counter Commands over Modbus
	Modbus driver writing/reading functions for any Modbus device  Responsive web interface
User Interface functions	Customised dashboards
	Dedicated widgets for monitoring control functions and events
<b>Automation Server func-</b>	Integration into BMS systems via BACnet and Modbus TCP/IP
tions	Email or SMS alerts
Reporting	Online or scheduled reports in XLSX, XML CSV format for events



### Car parking guidance

Connectable devices	Carlo Gavazzi Car Park sensors and actuators	
Control functions	Car Park Guidance	
User Interface functions	Responsive web interface Real time Car Park zones/bays mapping Analysis of historical occupation Commands and indicators display	
Automation Server functions	Scalability via Carlo Gavazzi CPY system	



# Software and interfaces MAIA Cloud

Remote access is the key to minimize the Total Cost Of Ownership of an UWP 3.0 powered installation; by leveraging the networking capabilities of MAIA Cloud, it is possible to take control of remote installations without leaving your office.



#### **Benefits**

- Reduced costs. Thanks to the VPN safe remote access, users do not need to travel and consequently waste money
  and time to solve their customers' issues.
- · Easy automatic remote networking
- · Hassle free regardless of destination and IP address.




#### **Main functions**

- · Authentication: MAIA Cloud users can remotely access their UWP 3.0 fleets and manage them if needed.
- Security. Remote connections to MAIA Cloud and to the remote UWP 3.0 Edge units thanks to encrypted tunnelling.
- Hassle-free. Thanks to the MAIA Cloud tunnelling functions, you do not need to worry about IP address changes and firewalls. You could always access your device, according to your security policies.
- Remote set-up and operation. Thanks to MAIA Cloud, it is possible now to remotely:
  - Set-up of any Modbus/RTU CG Meter (via UCS)
  - Set-up of any Modbus/TCP CG meter (via UCS)
  - Set-up of any Smart Dupline item (via UWP 3.0 Tool)
  - Establishment of a VPN connection to your PC
  - Surfing on the UWP 3.0 web-interface.



#### **MAIA VPN architecture**

**Building automation** 

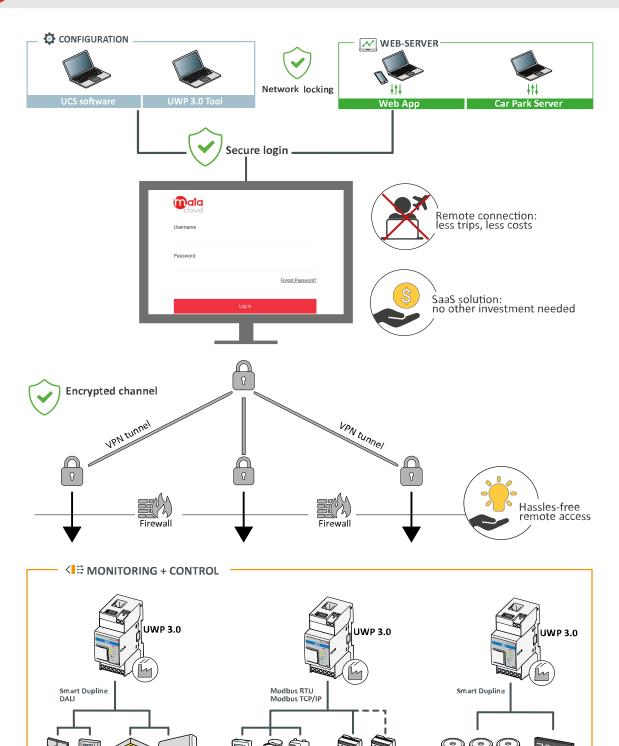




### **UWP 3.0 Tool**

UWP 3.0 Tool is the UWP 3.0 configuration software. It allows the user to:

- · carry out the system commissioning
- · define the automation and control logics
- · set the measuring instruments and sensors monitoring.

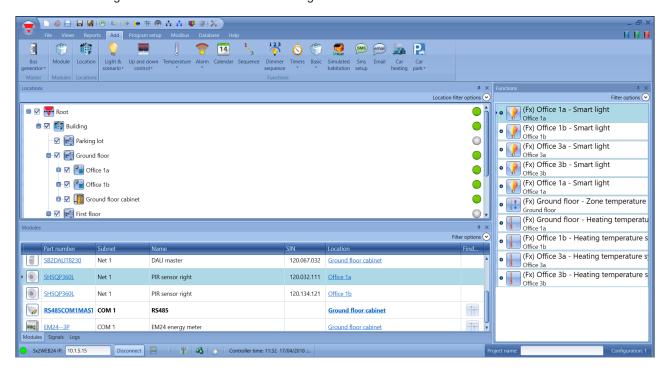

#### Main functions


- · Configure interfaces and communication protocols
- Execute the Dupline modules automatic scan for fast commissioning
- Configure and manage the connected modules
- · Define the control and automation functions
- · Generate a driver to monitor third party Modbus devices
- Set the data and events collection and storage from Carlo Gavazzi or third party instruments
- Configure the Carlo Gavazzi Car Park system
- Set up the Carpark devices (sensors, indicators, displays)
- Develop Modbus drivers for UWP 3.0 with both reading and writing functions for any Modbus device
- · Save a configuration offline for backup or any subsequent use
- · Disaster recovery via scheduled or on-demand triggers



# **UWP 3.0 Web App**

The UWP 3.0 Web App is the UWP 3.0 Web Interface, accessible through Web browsers from mobile or desktop devices. Through widgets contained in predefined and customised dashboards, it allows the user to:

- · view and export collected data
- control the automation functions
- · define specific settings (User Interface and Server Automation).

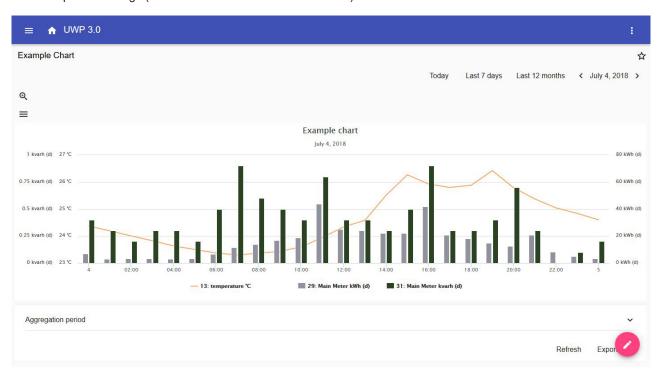

#### **Main functions**


- · View collected data as real time values or charts
- · Generate data and events reports
- Manage and adjust the functions parameters (e.g. modify temperature set points)
- Send commands (e.g. switching on/off or select scenarios)
- Configure Data Push Services to FTP/SFTP/FTPS servers or Em²-Server (Carlo Gavazzi)
- Configure MQTT link to IoT Hubs (Amazon AWS and Microsoft Azure)
- · Learn the main tasks by using the embedded tutorial



# **Car Park Server**

The Car Park solution includes the setup of the system and the monitoring of the installation. It allows the user to:

- · define the configuration of the user interface
- · view and export statistics for the car park occupancy.

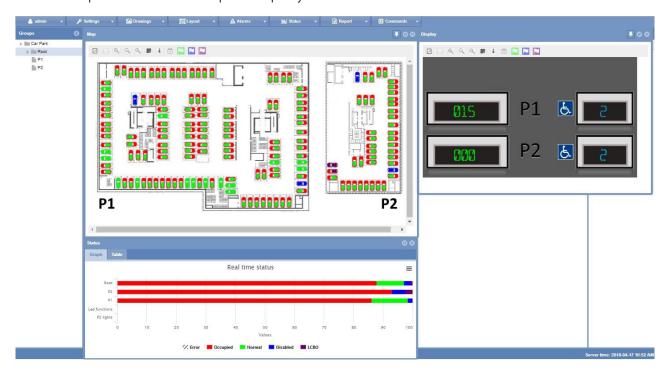

# Main functions

- · Collect data from ultrasonic sensors
- · Elaborate statistics: real time and historical occupation data from groups of sensors or single bays
- · Command displays and indicators
- · Represent data using with real time maps on the built-in car park web server
- Set the zone counter function for rooftop car park control or complete indoor/outdoor monitoring.

Note: The Car Park and the Data Push (to Em²-Server and IoT Hubs) functions can not be used concurrently.



# Cybersecurity



#### Introduction

Cybersecurity is the practice of protecting systems, networks, and programs from digital attacks. These cyberattacks are usually aimed at:

- · accessing, changing, or destroying sensitive information;
- · extorting money from users;
- · interrupting normal business processes.

Implementing effective cybersecurity measures is particularly challenging today because there are more devices than people, and attackers are becoming more innovative.

For UWP 3.0 SE (Security Enhanced), the security capabilities have been verified by UL to Level SILVER.

The SILVER rating certifies the enhanced security capabilities of UWP 3.0 SE regarding:

- Access Control
- Industry Privacy Best Practices
- · Product Security Maintenance.







#### **Pillars**

- **Disaster recovery**. UWP 3.0 includes a solid disaster recovery system for saving and restore both configuration and history data on USB stick, SD card, SFTP server.
- Easy upgrade function. UWP 3.0 Tool and Web-APP notify users about the availability of a new software and firmware version; the whole upgrade process is managed by the UWP 3.0 Tool.
- **UWP secure bridge function.** It permits you to establish a secure connection through LAN or Internet network between the UCS software and Carlo Gavazzi Modbus meters connected to UWP 3.0 via RS485 or LAN network. This way, you can perform the following tasks remotely:
  - configure a wired device via UCS without disconnecting UWP 3.0;
  - check the proper functioning of the devices, the real time measures, the status of alarms and the inputs/outputs
  - modify or correct the configuration parameters, in case of measures anomalies or of project structure changes.
- Secure access: thanks to MAIA Cloud, you can access a UWP 3.0 system through a secure VPN (virtual private network).
- **Minimalist approach**: UWP 3.0 has been designed to include only the necessary sub-systems into a highly optimized linux core, so to avoid unnecessary risks due to attacks to unmonitored services.

For further information, refer to the following guideline: "Security in energy monitoring and building automation applications based on the UWP 3.0 ecosystem".



# **Connection Diagrams**

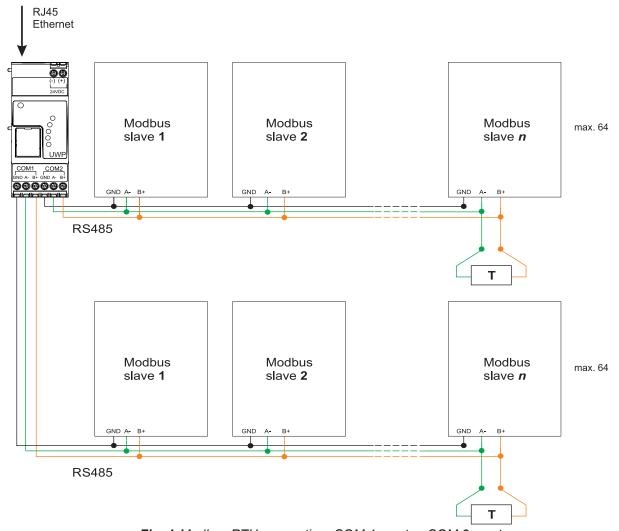


Fig. 1 Modbus RTU connection. COM 1 master, COM 2 master



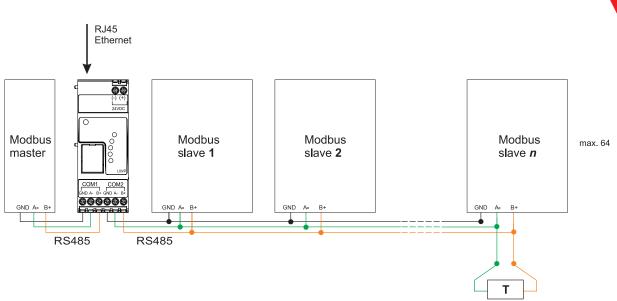


Fig. 2 Modbus RTU connection. COM 1 slave, COM 2 master

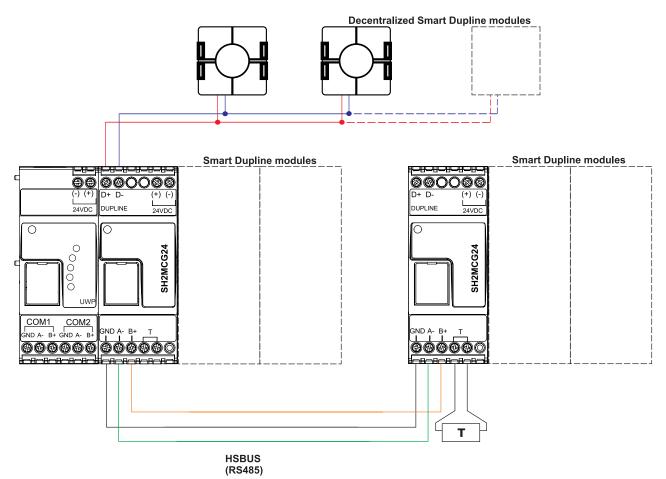


Fig. 3 Example of Smart Dupline modules connection using master channel generators






Fig. 4 Power supply



# References



### Compatible devices

Device	Instruction manual
UWP-MODEM-KIT-4G-E01	www.gavazziautomation.com/UWP-Modem-Kit-4G-E01.pdf
UWP-MODEM-KIT-4G-E02	www.gavazziautomation.com/UWP-Modem-Kit-4G-E02.pdf

### Further reading

Information	Document	Where to find it
Hardware manual	UWP 3.0 HW man- ual	www.productselection.net/MANUALS/UK/uwp3.0_system.pdf
Software manual	UWP 3.0 Tool man- ual	www.productselection.net/MANUALS/UK/uwp3.0_tool.pdf
Wireless manual	UWP 3.0 wireless installation manual	www.productselection.net/MANUALS/UK/uwp3.0_wireless.pdf
White paper	UWP 3.0 for Azure IoT- whitepaper	www.productselection.net/Pdf/UK/CGC-W-EE-IoT-002.pdf
Web App manual	UWP 3.0 Web App - Instruction manual	www.productselection.net/MANUALS/UK/uwp3.0_web_app_eim.pdf
User manual	MAIA Cloud system user manual	www.productselection.net/MANUALS/UK/MAIA_Cloud_EIM.pdf
UWP 3.0 How to order	How to order	www.productselection.net/DOCUMENT/UK/UWP3_how_to_order.pdf
UWP 3.0 Cybersecurity Guideline	Cybersecurity Guideline	www.gavazziautomation.com/CybersecurityGuideline.pdf
UWP 3.0 Quick connection guide	Quick connection guide	www.gavazziautomation.com/Quick_guide_connection_ENG.pdf



### MAIA Cloud licences

Licence	Description	Document
UWP-LICENCE-M01B	MAIA PLUS LICENCE-12 MONTHS VPN	
UWP-LICENCE-M02A	MAIA STANDARD LICENCE-2 DEVICES	
UWP-LICENCE-M02B	MAIA PLUS LICENCE-24 MONTHS VPN	
UWP-LICENCE-M04B	MAIA PLUS LICENCE-48 MONTHS VPN	www.gavazziautomation.com/MAIALicence_A4.pdf
UWP-LICENCE-M05B	MAIA PLUS LICENCE-60 MONTHS VPN	www.gavazziautomation.com/LicenceCode EIM.pdf
UWP-LICENCE-M10A	MAIA STANDARD LICENCE-10 DEVICES	www.gavazziautomation.com/LicenceCode_Liivi.pdi
UWP-LICENCE-M25B	MAIA PLUS LICENCE-300 MONTHS VPN	
UWP-LICENCE-M50A	MAIA STANDARD LICENCE-50 DEVICES	
UWP-ACTIVATION-KEY	MAIA ACTIVATION LICENCE	www.gavazziautomation.com/MAIAActivation_A4.pdf www.gavazziautomation.com/ActivationKey_EIM.pdf





#### How to order

Code	Description
UWP30RSEXXX	Monitoring gateway and controller
UWP30RSEXXXSE	Monitoring gateway and controller security enhanced



COPYRIGHT ©2022
Content subject to change.
DOWNLOAD THE UPDATED VERSION: www.productselection.net/PDF/UK/uwp3.0.pdf